

FLEECE JACKET ESD



Main Features

- ESD Protective Fabric
- Lightweight and Comfortable
- Practical Pockets
- Machine Washable
- Static dissipative threads woven in to fabric
- ESD Logo
- IEC 61340-5-1 Compliant
- ANSI/ESDS20.20 Compliant

Available colours : Gray, Dark Gray, Navy Blue & Black



Optional extra

- Custom embroidered logo service (MOQs Apply)

P/N - 702-003-##

Composition - 98% Polyester 2% Conductive Fibre - 300gr/m2

These ESD fleece jackets provide high-performance static protection in ESD-sensitive environments, combining comfort, functionality, and compliance with the highest standards. Perfect for ensuring the safety and protection of both workers and sensitive equipment in your cleanroom or lab.

SIZE - CM		Tolerance	XS	S	M	L	XL	2XL	3XL	4XL	5XL
A	½ Chest	±2	52	54	56	58	60	62	64	66	68
B	Back	±2	71	72	74	75	77	78	80	81	83
C	Shoulder	±1	43	44	45	46	47	48	49	50	51
D	Sleeve	±1	62	63	64	65	66	67	68	69	70

** When ordering please replace the colour and size with your options. For example 702-003-DG-L

* 1/2 CHEST (or half-chest) is used instead of a full circumference measurement to ensure accuracy, as it avoids errors caused by fabric stretching or inaccurate wrapping around the body. This method helps to determine the actual size of the garment.

ESD garment measurements

A. 1/2 CHEST

* Measurement of the garment laid flat, taken from one armpit to the other

B. BACK LENGTH


Measurement from the top collar joint to the bottom of the hem

C. SHOULDER

Measurement across the shoulders

D. SLEEVE

Measurement from the top of the arm

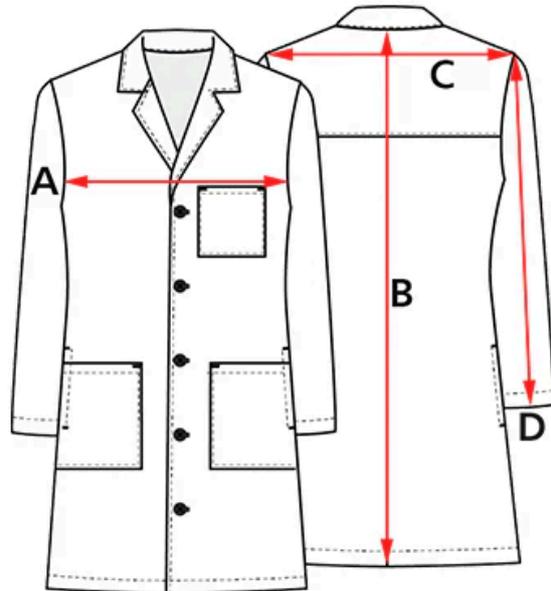

Washing instructions

- In order to preserve the long life of ESD clothing, you are advised to use industrial laundries who can provide controlled, documented washing procedures and environment.
- **MACHINE WASHABLE** in cold or not warmer than 40°C (104°F) lukewarm water with neutral liquid detergent.
- **DO NOT USE** detergent or fabric softeners containing bleach or chlorine or any other form of alkalis or acids.
- **DO NOT TUMBLE DRY**, dry in the open.
- **DOES NOT** require ironing, but if necessary the maximum temperature is 110°C (230°F) or lower.
- **DRY CLEANABLE** with any solvent except Trichloroethylene.

