



A WORLD LEADER IN FUME
EXTRACTION TECHNOLOGY



DustPRO 400

Last Updated on 02.02.2022

Particulate and dust extraction system for a variety of industrial applications.

BOFA's DustPRO 400 extraction unit has been developed to help with the filtration of swarf and smaller particulates during processes such as routing, mechanical engraving, grinding and turning.

One of the main problems with other router extraction relates to the type of pump used. Most have brushed motors which are noisy in operation and frequently burn out.

The high vacuum pump used in the DustPRO 400 is brushless and designed for continuous running for long periods of time before requiring servicing.

The bag filter has a large 6.4 litre capacity and the HEPA filter is very high efficiency.

Technology



HEPA filter



Multi voltage
sensing (MVS) unit



ProTECT service
plan



SureCHECK
quality standard

Key features of the DustPRO 400

Filter full indicator
Standard

High efficiency filters (99.997% @ 0.3 microns)
Standard

Simple operation
Standard

Small footprint
Standard

Filter change / system fail signal
Optional

Digital speed control
Standard

Large capacity filter bag
Standard

Low running costs
Standard

Remote stop / start interface
Optional

Contact BOFA at www.donaldsonbofa.com/contact/
www.donaldsonbofa.com/fume-extraction-systems/dustpro-400/

Supplied by
GroveSales
Quality Products - Reliable Service
Est 1990




Approvals: REACH and RoHS. See individual product technical data for specific accreditations



CALL US NOW ON +44(0)1202 588900 OR TAKE A LOOK ONLINE AT WWW.GROVESALES.CO.UK FOR MORE INFORMATION

Technical specifications

- 1. Hose inlet - 2 x 75mm
- 2. Unit lid
- 3. Latch
- 4. Feet
- 5. Power inlet
- 6. Exhaust outlet
- 7. Filter full indicator
- 8. Speed control
- 9. Power switch

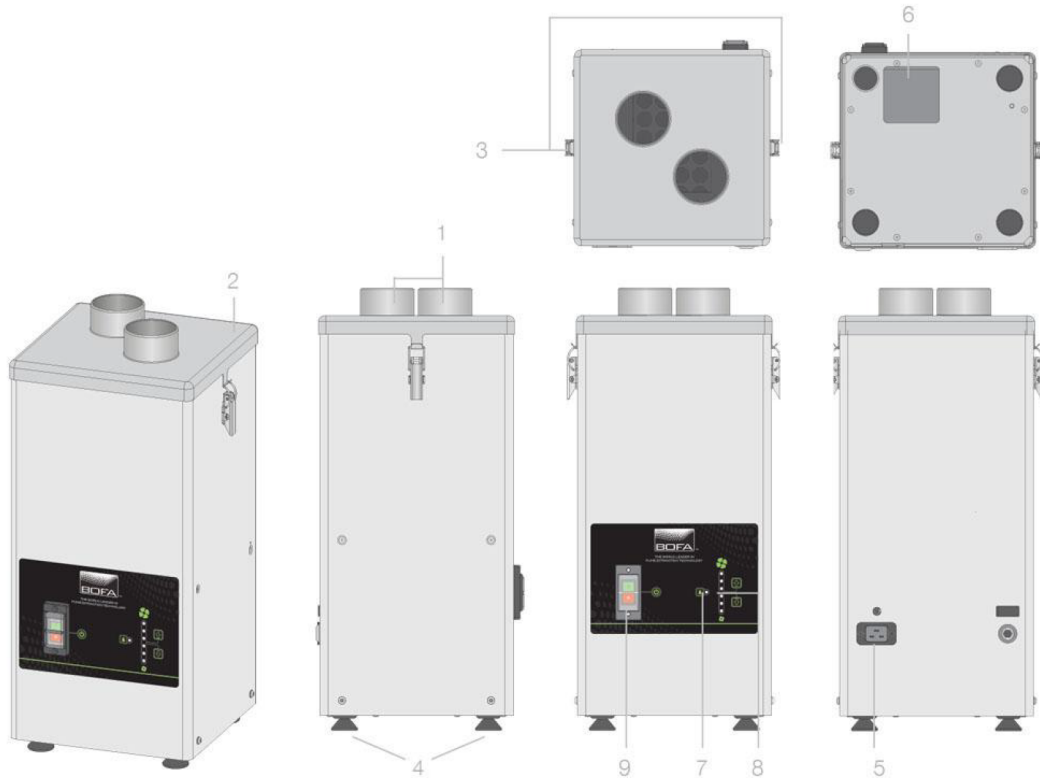

Airflow through filters

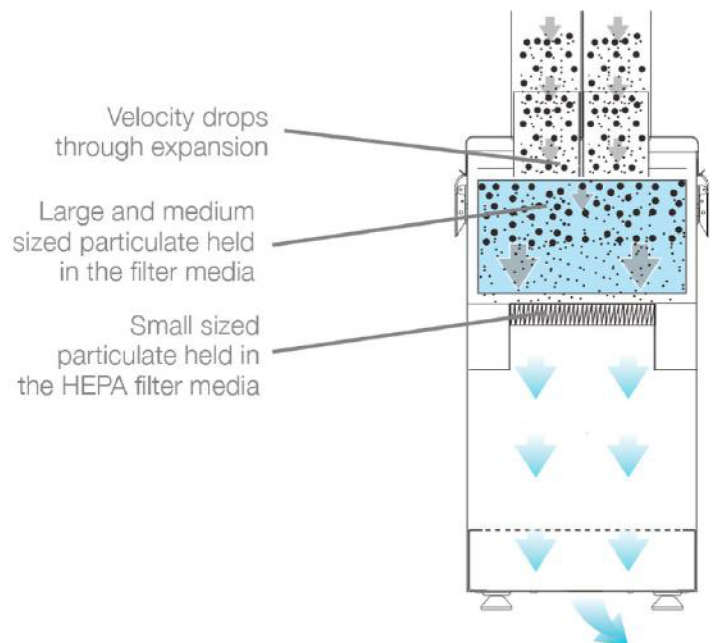

Technical data

	EU	US
Dimensions (HxWxD)	600 x 290 x 270mm	23.62 x 11.42 x 10.63"
Cabinet construction	Powder coated mild steel	Powder coated mild steel
Airflow / pressure	380m ³ /hr / 96mbar	223cfm / 96mbar
Electrical data	100-230v single-phase 1~ 50/60Hz full load current: 12.5 amps / 1.1kw.	100-230v single-phase 1~ 50/60Hz full load current: 12.5 amps / 1.1kw.
Noise level	< 66dBA (at typical operating speed)	< 66dBA (at typical operating speed)
Weight	14kgs	30.9lbs
Approvals	UKCA and CE	UKCA and CE

Bag filter specifications

Filter holding capacity	6.4 ltrs
Filter media	Polyester
Filter media construction	Bag filter
Filter efficiency	95% @ 0.9 microns

HEPA filter specifications

HEPA filter media	Borosilicate
HEPA media construction	Pleated with glue bead spacers
Filter efficiency	99.997% @ 0.3 microns

Unit part numbers

Model	Voltage	Part number	Foot switch
DustPRO 400 powder coated	100-230v	D0944A	A0009

Replacement filter part numbers

Model	Bag filter part number	HEPA filter part number
DustPRO 400	A1030241	A1030287

Datasheet correct at time of publishing.

Where applicable, the carbon used in BOFA units is capable of removing a wide range of VOCs, however it is the responsibility of the user to ensure the carbon is suitable for their application. For specific applications, please contact us for details.

Important Notice: *Many factors beyond the control of BOFA can affect the use and performance of BOFA products in a particular application, including the conditions under which the product is used. Since these factors are uniquely within the user's knowledge and control, it is essential the user evaluate the products to determine whether the product is fit for the particular purpose and suitable for the user's application. All products, product specifications, availability and data are subject to change without notice, and may vary by region or country.*

Think before you print! Please consider the environment before printing this document.

Supplied by

GroveSales
 Quality Products - Reliable Service
 Est 1990

CALL US NOW ON +44(0)1202 588900 OR TAKE A LOOK ONLINE AT WWW.GROVESALES.CO.UK FOR MORE INFORMATION